



Blast Delay

First Registration Process


The screenshot shows the user interface of the Blast Delay software. At the top left is the 'BLASTDELAY' logo and name, and at the top right is a menu icon. Below this is a green bar graph showing the delay curve. Underneath the graph is a control bar with a parameter dropdown set to 'DRY/WET', a speed dropdown set to 'x1', and buttons for 'clear', 'recall', and a trash icon. Below the control bar are two waveform displays: a blue one on top and a red one on the bottom. At the bottom of the interface is a control panel with five knobs: 'DRY/WET' (100% / 100%), 'VOLUME' (-2.499 dB), 'TIME' (1/8 BAR), 'FEEDBACK' (25%), and 'FILTER' (0%). Below the knobs are five checkboxes: 'SYNC' (checked), 'PINGPONG', 'FREEZE', 'POLARITY', and 'PITCH'.

Blast Delay

First registration process

1. Go to <https://www.audioblast.me/download/>
2. You will now choose to download either the Windows or MAC version of your product.
3. Once you've downloaded the installer, install the plugin.
4. The first time you launch the plugin please unlock it with the password combination given to you by Audioblast!

The first time you launch the Blast Delay in your DAW the settings view appears.

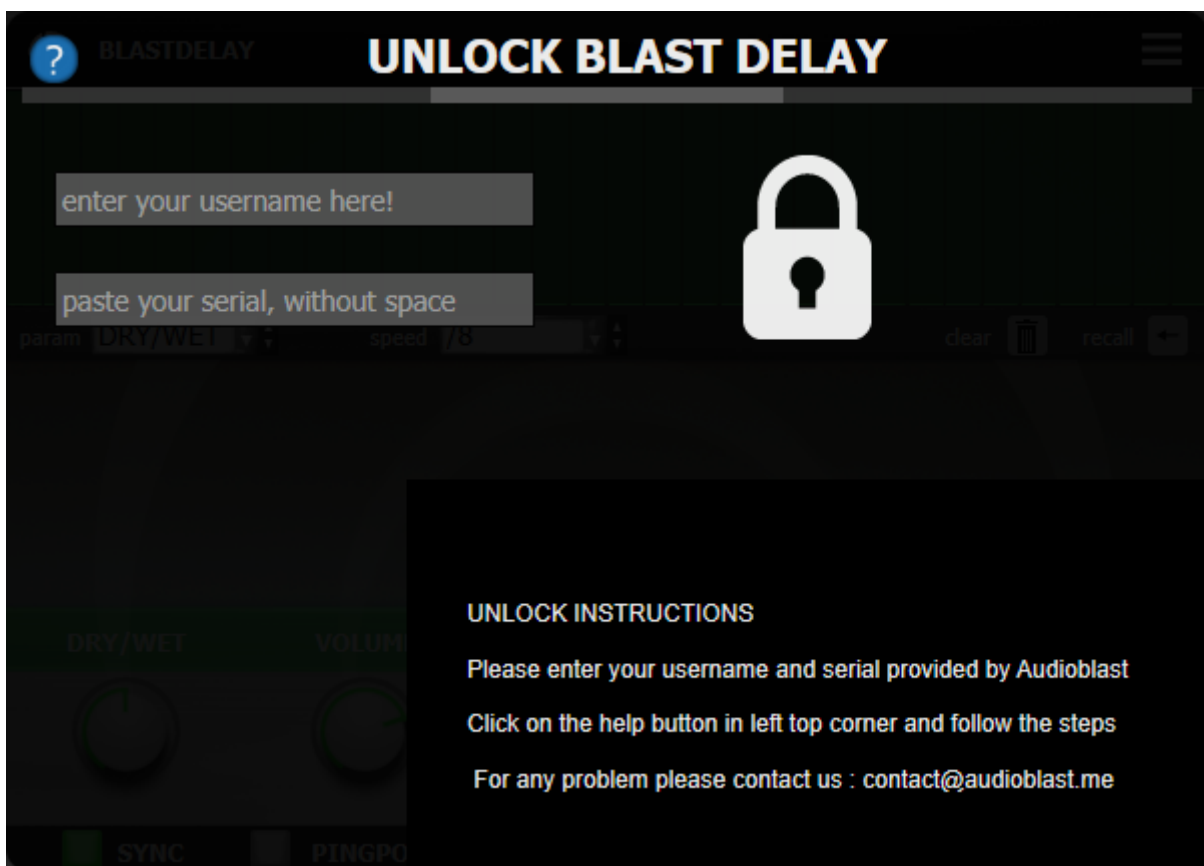

Enter your user name (ex : user@audioblast.me) and the serial you received by e-mail then press Enter and exit the setting view by clicking on the red cross on the top right of the Interface.

Until the VST is unlocked you will have no sound!

Your Username will look like: user@audioblast.me (sample)
And Your Password: PCILLBJFANZMZJLZHZZJZZZ (sample)

If you are having any issues at all installing and activating your software please contact contact@audioblast.me